



## IG SERIES

### Standard Display Freezers

#### MODELS

- IG 208
- IG 308
- IG 408
- IG 508
- IG 608

IG-408

### FEATURES

#### CONSTRUCTION

- Pre-painted steel exterior
- Stucco aluminum interior
- Heavy-duty 2<sup>1</sup>/<sub>2</sub>" casters
- Defrost water drain
- High product loading line
- Aluminum extrusion top frame
- Lids contain safety glass
- Low energy consumption
- Durable, unobtrusive glass lid frame allows high visibility of products
- 2<sup>3</sup>/<sub>8</sub>" insulation in sides, 2" in bottom

#### REFRIGERATION

- Refrigerant: R-134a
- Minimum of 4" clearance required between any cabinet side and wall
- Temperature range: 12° to -8°F (-11° to -22°C)
- R-factor (insulation efficiency rating): 17.24


#### WARRANTY

- Standard limited four year extended compressor and one year limited parts and labor

### OPTIONS

- Sliding solid insulated lids
- Additional baskets and dividers
- Lighted canopies
- Sneeze guards

### STANDARD BASKET CONFIGURATIONS

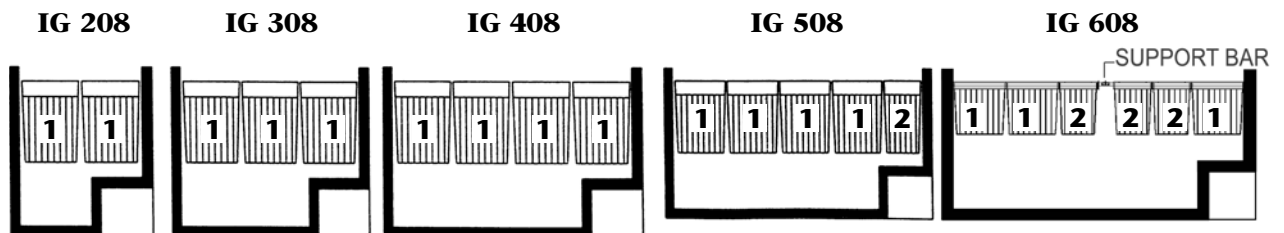

**1** = Basket with dimensions of 11<sup>1</sup>/<sub>4</sub>"W x 21<sup>3</sup>/<sub>4</sub>"D x 13<sup>1</sup>/<sub>8</sub>"H (includes one vertical divider and one horizontal divider)  
**2** = Basket with dimensions of 8<sup>1</sup>/<sub>4</sub>"W x 21<sup>3</sup>/<sub>4</sub>"D x 13<sup>1</sup>/<sub>8</sub>"H (includes two horizontal dividers)




# COLDIN™ IG SERIES STANDARD DISPLAY FREEZERS

## TECHNICAL SPECIFICATIONS

MODEL	DIMENSIONS (in.)			DIMENSIONS (mm)			VOLTS	AMPS	UNIT H.P.	CAPACITY CU. FT. AT LOAD LINE	SHIP CU. FT.	SHIP WT. LB/KG
	L	D	H	L	D	H						
IG 208	29 <sup>9</sup> / <sub>16</sub>	25 <sup>7</sup> / <sub>8</sub>	36 <sup>1</sup> / <sub>2</sub>	751	657	927	115	3.4	1/4	6.1	19.4	101/46
IG 308	41	25 <sup>7</sup> / <sub>8</sub>	36 <sup>1</sup> / <sub>2</sub>	1041	657	927	115	4.2	1/4	9.5	27.1	119/54
IG 408	51 <sup>9</sup> / <sub>16</sub>	25 <sup>7</sup> / <sub>8</sub>	36 <sup>1</sup> / <sub>2</sub>	1310	657	927	115	5.3	1/4	12.5	34.9	136/62
IG 508	60 <sup>1</sup> / <sub>2</sub>	25 <sup>7</sup> / <sub>8</sub>	36 <sup>1</sup> / <sub>2</sub>	1537	657	927	115	6.2	1/4	14.1	40.3	163/74
IG 608	69 <sup>3</sup> / <sub>4</sub>	25 <sup>7</sup> / <sub>8</sub>	36 <sup>1</sup> / <sub>2</sub>	1772	657	927	115	5.0	1/2	16.7	45.0	183/83

### HIGH AMBIENT SPECIFICATIONS AVAILABLE ON REQUEST.

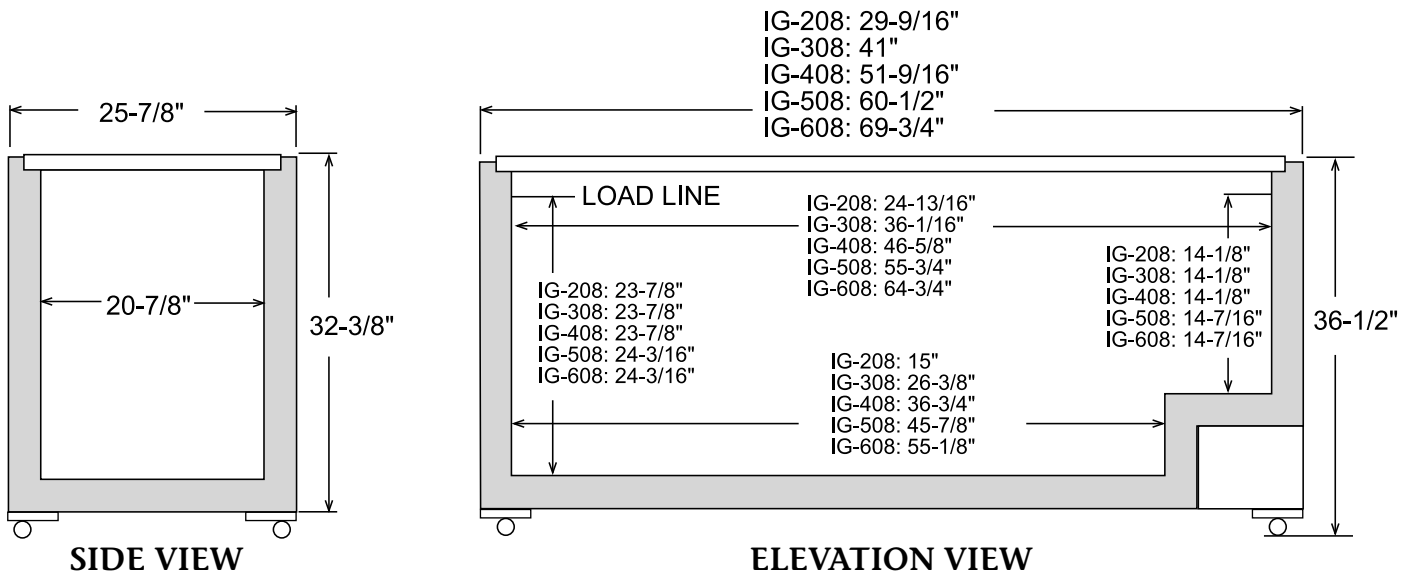


## LISTINGS



## HOOKUP

Via plug in, 6<sup>1</sup>/<sub>2</sub> foot long, flexible 3 wire 18/3 cord with molded plug.



NEMA 5-15P

## BID SPECIFICATIONS

Item no. IG-\_\_\_\_\_  
Provide \_\_\_\_\_ ( ) Standard Display Freezer(s) Master-Bilt model IG-\_\_\_\_\_.

Freezer to be constructed of a pre-painted steel exterior with stucco aluminum interior. Sides of freezer will contain 2<sup>3</sup>/<sub>8</sub>" insulation with 2" insulation in bottoms.

Freezer to be furnished standard with baskets, basket dividers, thermometer and lock. Additionally, it will be provided with heavy-duty 2<sup>1</sup>/<sub>2</sub>" casters, an aluminum extrusion top frame and a defrost water drain. Lids will contain safety glass.

Refrigeration system will use R-134a refrigerant. The temperature range will be

12° to -8°F (-11° to -22°C).

Freezer to have standard limited four year extended compressor warranty and one year limited parts and labor. Freezer to be UL, C-UL and NSF listed.

**NOTE:** Cabinet designed for optimum performance in air-conditioned area at 75°F ambient and 55% relative humidity. All specifications subject to change without notice.



908 Highway 15 North • New Albany, MS 38652  
PHONE: 800-647-1284 or 662-534-9061 • FAX: 800-232-3966 or 662-534-6049 • www.master-bilt.com

